. . HART . .

Emery Wheel Co.

24 Hunter St. West,
HAMILTON, - ONTARIO.



MANUFACTURERS OF


EMERY WHEELS

AND

EMERY WHEEL MACHINERY

COMPLETE CATALOGUE SENT TO ANY ADDRESS
ON APPLICATION.

ROGERS' SAW GUMMER.

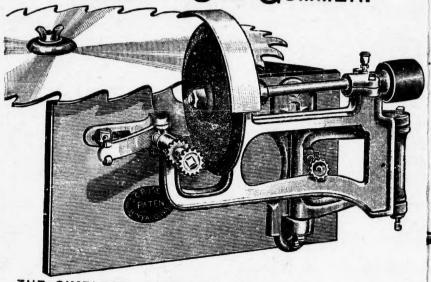

THE SIMPLEST, CHEAPEST AND BEST GUMMER EVER MADE

As an appliance for Gumming Saws the Emery (or Corundum) Wheel has almost undisputed possession of the field. It does the work quickly, and, when a wheel suitable for the work is used, without over-heating or case-hardening.

The chief difficulty in the way of the universal adoption of Emery Wheels for gumming saws has been the want of a simple, effective and low priced device for carrying the wheel. dinary mandrel or fixed grinder is quite unsuitable for such work, especially if the saw to be gummed is large. The wheel ought to be under the immediate control of the operator, who should be close to the wheel and be able to move it to the saw while the latter remains stationary.

These conditions are all fulfilled in the

ROGERS' SAW GUMMER.

The wheel is absolutely under control and the simple stops and guides make the work perfectly regular and uniform.

This Machine consists of: 1st. A frame, with spindle and emery wheel. 2nd. A double pivoted hinge attached to bracket on table. 3rd. An adjustable chuck for holding the saws.

The guides and stops make it unnecessary to mark off the saw before gumming.

TRY ONE; it won't cost you anything if it is not what you want Sent on trial to responsible parties.

Full directions with each machine.

LIST PRICE.....

SEND FOR NET CASH PRICE.

For Circ

Including Pulley

This Filer


For Band

Pack

No. 1 (Factory size).

SEMI-AUTOMATIC.

For Circular Saws 6 to 40-inch diameter, Rip and Cross-cut.

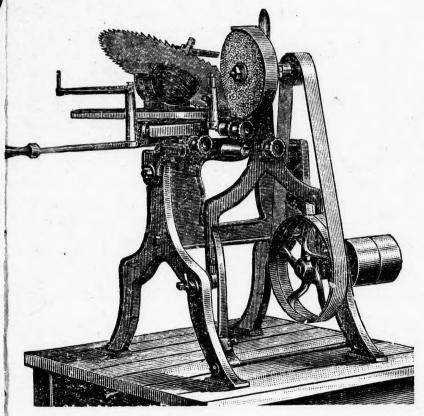

LIST PRICE.

SEND FOR NET CASH PRICE.

This Filer can be made Automatic and to file band saws,

EXTRA.

For Band Attachment \$15 00

Packed F. O. C. Hamilton.

(2)



JMMER

rundum) It does is used,

ption of simple, The orch work, ought to ould be tale the

ps and

d emery n table.


he saw

ou wan^t

No. 1 (Factory size).

AUTOMATIC.

For Circular Saws 6 to 40-inch diameter, Rip and Cross-cut,

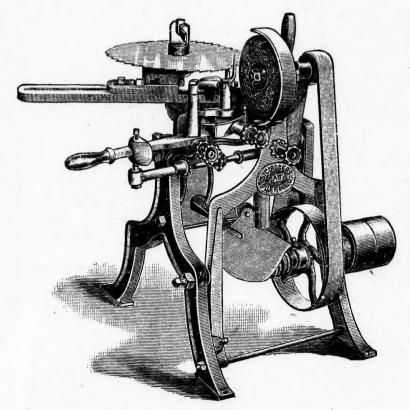

LIST PRICE.

Including 3 Emery Wheels, Belt, and Tight and Loose Pulleys, and Table, as shewn\$85 oo

This machine can be supplied without the Automatic device (see page 2) for \$65 oo

SEND FOR NET CASH PRICE.

Packed F. O. C. Hamilton.

For Circ

Witho

P

No. 2. (Small Mill size.)


AUTOMATIC STYLE.

For Circular Saws from 8 to 40-inch diameter, Rip and Cross cut.

ss-cut,

\$85 00

\$65 00

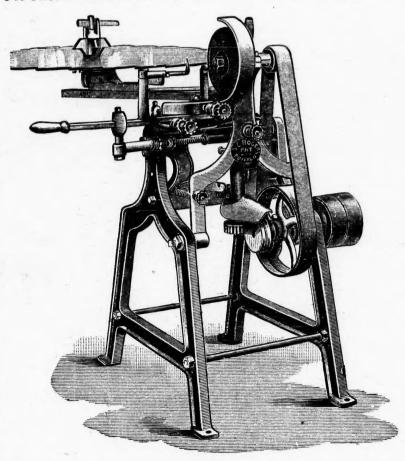


LIST PRICE.

As shown with 3 Emery Wheels 8-inch dia-		
meter · · · · · · · · · · · · · · · · · · ·	\$105	00
Without Automatic attachment	85	00
AT SEND FOR NET CASH PRICE,		
Packed F. O. C. Hamilton.		

No. 3. (Large Mill size)

AUTOMATIC STYLE.

For Circular Saws from 8 to 72-inch diameter.

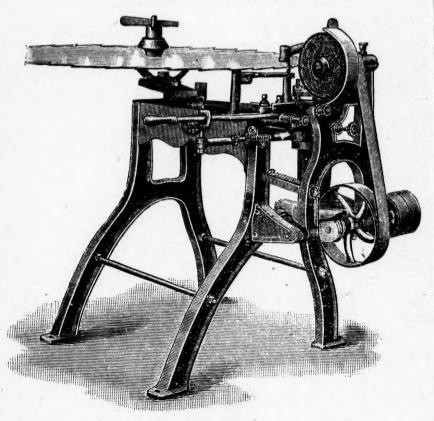

LIST PRICE.

As	shown	with	3	Emery	Wheels	8-inch	dia-		
	meter			• • • • • •				\$130	co
Wi	thout A	utoma	tic	attachn	nent			08	00

SEND FOR NET CASH PRICE.

Packed F. O. C. Hamilton.

Ove been s as ev

Th vanta

THE

THE

THE

THE

Over 2,500 of the Rogers Filers have been sold and the demand is as steady as ever.

This grand sale arises from the advantages the Filers afford the user;

THEY SAVE TIME.

More than half the time of hand filing is saved.

THEY SAVE POWER.

Because they keep the teeth always in perfect order and the saw perfectly even,

THEY SAVE FILES.

Because an emery wheel excels a file in cutting quality, and costs very much less.

THEY SAVE SAWS

These are kept round and true, and the waste of material in jointing is saved.

130 00

98 00

WEIGHT, CAPACITY, DIMENSIONS AND SPEED OF ROGERS' SAW FILERS.


Size of Diameter of Speed of Emery Wheel, F. and L. Pullevs Countershafe	900	8 x 3/46 in. 600	8 x ¾ 6 in. 600
	in.	" 8 to 40 in.	" 8 to 72 in.
	No. I 150	No. 2 250	Nc. 3 350

ONE USER OF ROGERS' SAW FILERS WRITES:

(7)

". We bought two new shingle saws about the same time that we "bought your Filer, and have not used a file on them, and they are in "as good shape as when they came from the maker. We sharpen them "in one-sixth the time of hand filing."








ROGERS'

BAND SAW SHARPENER.

For Band Saws 2 to 6 Inches Wide.

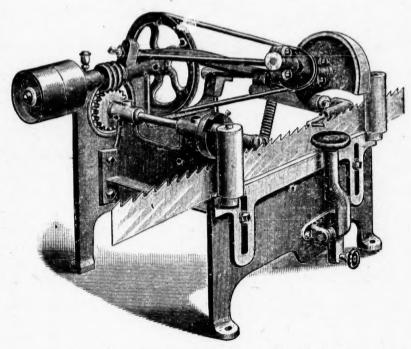

This machine is especially designed for Band Re-Saws, and is sent out complete in every particular ready for the saw. If you have a band Re-Saw, and have trouble in keeping it in order, we will be pleased to send one of these machines to you for 30 days' inspection and trial, to be returned at our expense if not entirely satisfactory,

There will be no trouble in setting it up, as we send the saw-

holding devices with each machine.

It is simple in design and easily operated. After the teeth of a band re-saw have been put into good and uniform shape by the use of this machine, but little attention is needed to maintain them in


perfect shape and efficiency.

The sharpening is finished complete, and is better than can be done by hand. The pawl moves the saw to the left at the rate of of about 45 teeth to the minute. The emery wheel moves in and out of each tooth as it passes, grinding either front, throat or back, or all three, as may be deemed necessary.

The 4-inch tight and loose pulleys should run 850 revolutions per minute. The machine is compact, taking up as little room as possible for efficiency. It weighs, ready for hipment [with table] 190 pounds. It is shipped in the table on which it stands when in use, and is complete in every particular except the 2 x 6 scantlings which carry the saw holders.

ROGERS'

PLANER KNIFE GRINDER

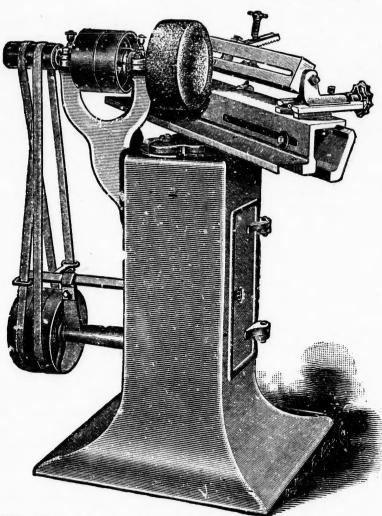

For Knives to 26 Inches (including Whe

30 days' trial allowed.

Trillyes	10	20	inches	(including	Wheel)	\$100	00
1 1	6.6	32		• •		112	00
11		38		• •		125	00
11		44		" "		140	00
4.4		54	4 4	* *	* * * *	165	00
, ,		60	4 4	6 :	6.6	.0-	-

ATT SEND FOR NET CASH PRICE.

Has one l

differ face be see knife and to other a con preci-

work

forth cran necte cran exter by ac quire

at di erati is in little

and

gent wor

inch up a each

met Wei

suit bars

ER

ROGERS' PLANER KNIFE GRINDER.

Has points of advantage over some others, the principal one being its adjustability for flat or concave grinding.

By slacking one bolt the slide or bed can be set at different angles before the emery wheel, which has a flat face with the outer corner rounded off. If the slide or bed be set at a right angle to the emery wheel spindle the knife will traverse back and forth against the flat face and the knife be ground a flat bevel; if it is set at any other angle the rounded corner will do the grinding and a concave bevel be the result. This feature will be appreciated by those who prefer a flat; stout edge for rough work, and a thin concave edge for fine work.

The shifting of the belts that drive the bed back and forth is accomplished by a simple arrangement of bell cranks inside the pedestal, one above and one below, connected by a rod with joints at either end. The lower crank is connected to the belt shifter, and the upper one extends up through the top of the base and is acted upon by adjustable dogs when the bed has travelled the required distance.

The arrangement is such that the bed can be adjusted at different angles without affecting the belt shifting operation; in fact, the bed can be swung while the machine After the machine is started it requires is in motion. little or no attention.

The carriage has an even traverse back and forth. and reversing is accomplished without noise or jar.

The shafts are steel and run in boxes lined with genuine babbitt metal

These machines are manufactured by first-class workmen and are fully warranted.

The emery wheels supplied with machines are 8 inches in diameter, 31/2-inch face, They can be used up almost entirely. New wheels are furnished at \$4.25 each.

THE TIGHT AND LOOSE PULLEYS are 6 inches in diameter, and should run 1100 REVOLUTIONS PER MINUTE. Weight of 26-inch machine, boxed, 450 pounds.


We keep machines in stock with knife bars or holders suitable for light knives, but will furnish machines with bars suitable for any knife without extra charge.

owed: 00 00

12 00

37 00

ROGERS' COMBINE.

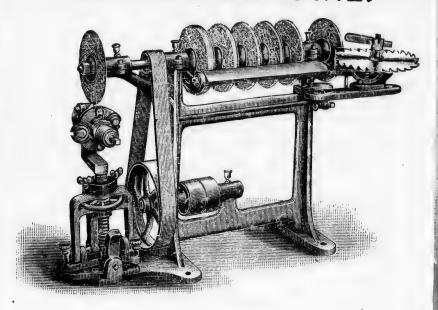

COMPRISING

A TOOL GRINDER, carrying five emery wheels of different shapes and sizes, for knives and tools.

A HEAD GRINDER, for Shimer heads, in combination or alone. A practical rig in every respect.

A SAW GUMMER, simple and accurate.

PRICE LIST.

Tool Grinder, with 5 wheels
Head Grinding attachment 8in. dia 20 co
Saw Gummir gattach ment offit, dia
Saw Gumming attachment
Machine with all attachments
Head Grinder alone, complete

send for Net Cash Prices.

Shin The war

as a comis no suit Not than shap shav tach


of ti

peni join the l kep

no o have of the

whe are revo

ROGERS' COMBINE.



THE HEAD GAINDER in combination or alone acts as a vise to hold the head while adjusting the cutters. It completes the work of sharpening, no files being used. There is nothing complicated about it, and it is quiekly changed to suit any size of head or any angle or bevel on the knives. Not only does this machine do the work in much less time than it can be done by hand, but it keeps the cutters in good shape; the throats well cut out so as to give clearance for shavings, making the work easier on the head. This one attachment will pay for the machine in a short time in the item of time saving alone.

SAW SHARPENER. The Saw Gumming and Sharpening Attachment is very effective. It can be used for jointing the saw, and simple stops make the teeth uniform, the hook and depth of all teeth the same, so the saws can be kept in first-class order with very little trouble.

TOOL GRINDER. The gang of emery wheels needs no commendation. Every millman knows how handy it is to have various shaped wheels always ready. The shape of faces of these wheels can be varied to suit special uses without extra charge.

HEIGHT OF MACHINE to top of 8-in. wheels, 24-in.

Weight of complete machine, 250 pounds- Emery wheels are 8 inches in diameter. The tight and loose pulleys are 4 inches in diameter 2½ in. face, and should run 500 revolutions per minute.


of dif-

ination

44 00

Rogers' Brazing Lamp.

FOR BAND SAWS UP TO 11/4 IN. WIDE,

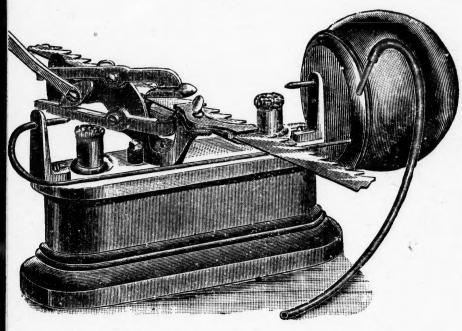

WHEELS

EMERY

THICKNESS IN

PRICE

REVISED

This machine does away with tongs, kinks, curved and defective brazes.

The two flames meeting at the saw produce great heat. Saws are heated in less than 30 seconds

Sent on 10 days' trial to responsible parties.

DIRECTIONS—File the laps; place the saw on the form with back to the straight edge, and clamp in place by tightening thumb screws; clean the silver solder with fine sand paper and acid; also the laps; place the solder in the lap; use plenty of powdered borax; light lamps, fill the rubber globe by blowing in mouthpiece, watch until the saw is a cherry red, then press down on the lever, when the clamps will seize the saw firmly and give it mper without any danger of checking or kinking the saw.

PRICE.....\$15.00

Send for Net Cash Price.

REVISED PRICE LIST OF EMERY WHEELS.


ks,

ice ids

htind
p;
ber
s a
ips
per

								-		-					-							Dans
	70	24	1	11	74	1/2	134		61	21/4		21/2	234		3	31/4	31/2	101	334	1	4	minute
1	1					1		-	I	1	1	8			18	0.50		00	1	7	01 1	-
HO	40			0	55	00		3	20	-0	0	000			2 8) (-	7.4	1 20	-
1	0			0	65	70	-	75	8	×o	5	8		-	3	5	-	21	-	2	2 05	1
-	200			M	20	1 05	-	7 1	1 25	1 3	L	1 45	-	1	65	1 75	16	8		35		
103	So				2	, ,		7 1	1	000	7 1	-			20		2	09		V	7 2	
	00		-		N	1 40	1	55	7 1	-	2		1	•	2) 1	3 75	
-	0	-	I		v	1 75	-	16	2 15	61	7		7	(4	95			35		50		
53	10	-	-		300	2 10	0	1 2	2 60	0	v		~					10		35		
	01 1	00 ,						10			2 10	2 65	, (1	7	25	4 55	4	20	v	15	5 43	
101	1 25	-	-		٦,	4 45		0		0	2) 1					00		2		
	1 40	_	CI		09			40		4	0		2					2				
		•						0		9	v		1				5	40				
		1	0		0	4 CC + 1	מ	3	100	3	50		. 0	10		11	-		12 (13 70	
		2	j					40		0	2.							-				
		e	4				1 0	9		6	00	10 00	II			13						
-		> <	· W		77	7 50	8	75	10 00	II	25	12 50	13	5 15	8	91	5 17	20				
(+ 1	25		28		110	3 8	12 40	2	7	5 25	16			6I				nd military		
0		2	0 1					3 6		2 1			I			20						
7		ur,	-		3			57	14 00	13			1			1						
4		00	10					40	19 50	21			20			30				-		
19		10	2			19 4	10 22	25	25 00	27			33			39	-				40 07	
0		13 25	17	00 00	7,0		800	200	32 00	7.	7.	39 50	043 25	5 47	00 /	50 75	5 54	50	28	8		1250
0		34	100				1000	2		200			L			9						
	77 00	0	3 5			62	000	200	36 75	+ 1			63			7.4		_		-	75	
	14 50	19	25			55 5	04:	17		0			3			1 8						
	17 00		29 (00	43 0	0.50	8		04	8		0/			3-						
30								****	87 50	0	1		0	13	00		153	_		-	1/2 0	
-										-	-			200			210	8		7	20 00	

For all Wheels thinner than ½ in. use list of ½ inch. N.B. are listed the same as next size thicker. Write for Discounts.

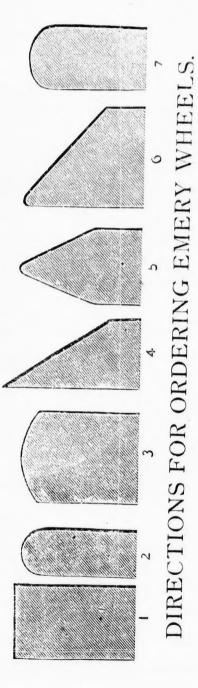

State diameter, thickness, and size of Mandrel hole.

For shape of face, give No. from diagram, or a drawing if different from them. Give number of revolutions of spindle or shaft.

State kind of metal to be ground: e. g., cast or wro't iron, steel or brass, or

for general purposes, etc.

State whether the article to be ground is held in the hand of the operator, or State if wheel is to grind surface only, or the edge of the article to be ground.

whether it is held mechanically and fed up to the wheel.